

ELMO

Overhead Projectors

HP-L11 • OPEN HEAD TYPE

HP-L11QLC • OPEN HEAD WITH LAMP CHANGER

HP-L11CH • CLOSED HEAD TYPE

ELMO's newest table-top type Overhead Projector the HP-L11, HP-L11QLC and HP-L11CH meet today's toughest demands combining the quality images with an irresistible price.

- Solid metal body
- 10×10in.(254×254mm) aperture
- Rack and pinion focusing
- Quick lamp change device provided(HP-L11QLC)
- Efficient lens head available in two styles.
Open-head, as pictured(HP-L11 and HP-L11QLC),
or closed-head(HP-L11CH).
- Stage interlock switch
- Safety thermal protection
- Forced air-cooling
- Writing roll attachment(option)easily mounted
- UL/cUL approved



Shown HP-L11




Visualizing technology since 1921

SPECIFICATIONS

Model	HP-L11	HP-L11QLC	HP-L11CH
Power source	AC 120V 60Hz		
Power consumption	390W		
Aperture size	254 × 254mm (10.0×10.0in.)		
Projection lens	290 mm (11.4in). Rack & pinion focusing		
Magnification	× 4 ~ × 8		
Projection distance	1.45 ~ 2.66 m (4.76 ~ 8.73ft)		
Image size	1.0 ~ 2.0 m (3.3 ~ 6.6ft)		
Projected material	Transparency and roll		
Writing roll attachment	Attachable(option)		
Projection lamp	Supplied with ANSI EYB(82V-360W).An alternative replacement is EYB-5(86V-360W)which provides extended life with reduced brightness.		
Quick lamp change device	—	Built-in	—
Tilting angle adjustment	Up to 20°		Up to 25°
Forced air cooling	Forced-air cooling by motor fan		
Safety interlock switch	Built-in safety interlock switch cuts off power when stage frame is opened.		
Safety thermal cut-off switch	Built-in safety thermal cut-off switch automatically cuts off power to lamp if projector overheats.		
Dimensions Folded	355×345×235mm(14.0×13.6×9.3in.)		355×345×235mm(14.0×13.6×9.3in.)
Assembled	355×345×755mm(14.0×13.6×29.7in.)		355×345×745mm(14.0×13.6×29.3in.)
Weight	5.7kgs(12.6lbs)		

NOTE: Dimensions and weight are approximate. Design and specifications are subject to change without prior notice.

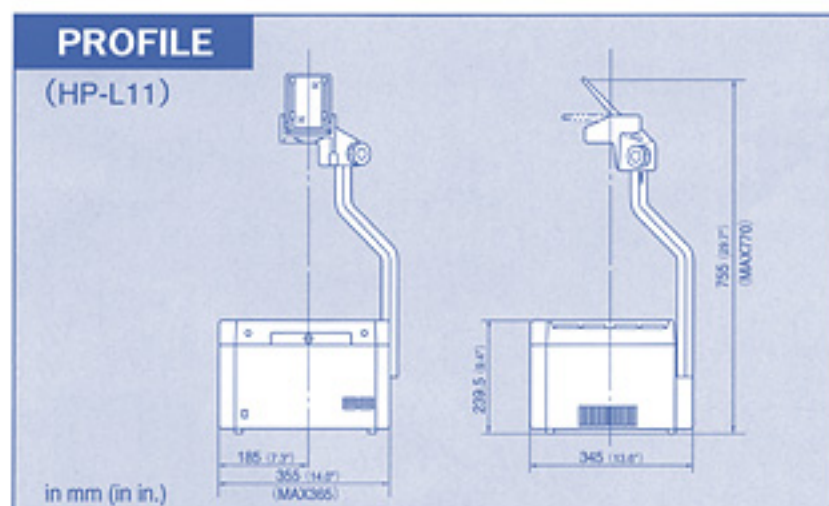

ELMO ELMO CO.,LTD.

ELMO Mfg. Corp.
1478 Old Country Road,
Plainview, NY 11803-5034, U.S.A.
Tel. 516-501-1400 Fax. 516-501-0429
E-mail: elmo@elmousa.com
Web: <http://www.elmousa.com>

6-14, Meizen-cho, Mizuho-ku, Nagoya, 467-8567 Japan
E-mail: foreign-div@elmo.co.jp

ELMO Canada Mfg. Corp.
44 West Drive, Brampton,
Ontario, L6T 3T6, Canada
Tel. 905-453-7880 Fax. 905-453-2391
E-mail: info@elmocanada.com
Web: <http://www.elmocanada.com>

ELMO (Europe) G.m.b.H.
Neanderstr. 18,
40233 Düsseldorf, Germany
Tel. 0211-376051-53 Fax. 0211-376630
E-mail: elmoeurope@AOL.com
Web: <http://www.elmo.de>

Distributed by